


MIRROR-LUX® LED

TECHNICAL & ORDERING DATA

- **Voltage:** 120-277
- **Light Source:** LED
- **Mounting:** Surface mount. Mounting holes (4) provided for mounting to a mechanically sound surface. Recessed mounting kit offered as an available option.
- **Dimmable:** 0-10V
- **Color temp:** Standard 3000K. Other color temperatures available; consult factory.
- **ETL** listed for damp locations; IP65
- **ADA:** Conforms to regulations of the Americans with Disabilities Act.

Custom sizes available; consult factory.
Re-lamp by removing glass.

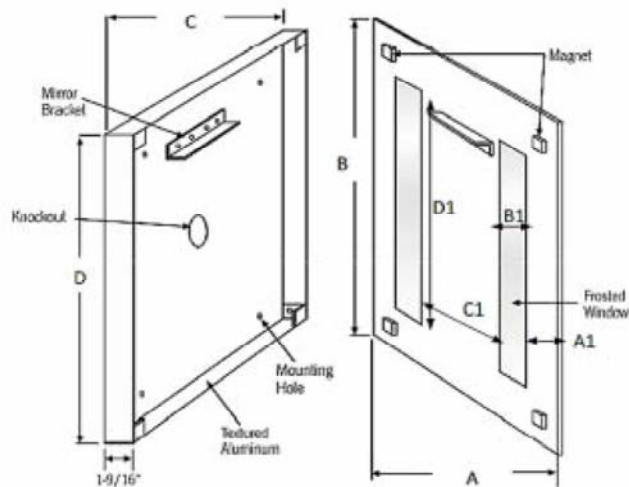


DIMENSIONS

Glass

A	24.00"
A1	2.00"
B	40.00"
B1	1.00"
C1	18.00"
D1	31.50"

Box

C	22.00"
D	36.25"
E	4.00"
F	4.50"
G	11"
H	18"
Total Watts	25
Total Lumens at 3000K	1793

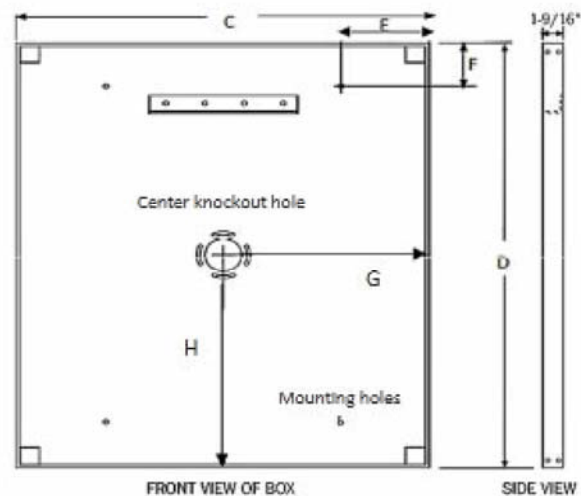

Drawings not to scale.

Note: Electrical connection is made through the center knock-out to 11-inch whip to the Fulham LED driver. If required, a different knock-out location can be created locally.



AAMSCO LIGHTING, INC.