



# CLEARMIRROR®

THE DIFFERENCE IS CLEAR


## 16"X16" SHOWER CLEARMIRROR

16104-1161624M




### SPECIFICATIONS

- Copper-free, corrosion-resistant mirror.
- Tolerance:  $\pm 0.0625"$
- Mirror must mount flush with tile or surround.
- UL Listed for use in showers.
- Transformer located in remote/accessible area.
- Electrical: 24Volt/35Watt.

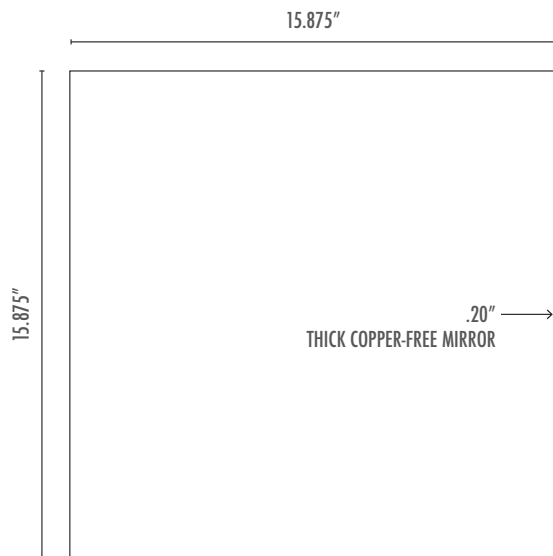

FRONT VIEW  
SCALE 3"=1'-0"

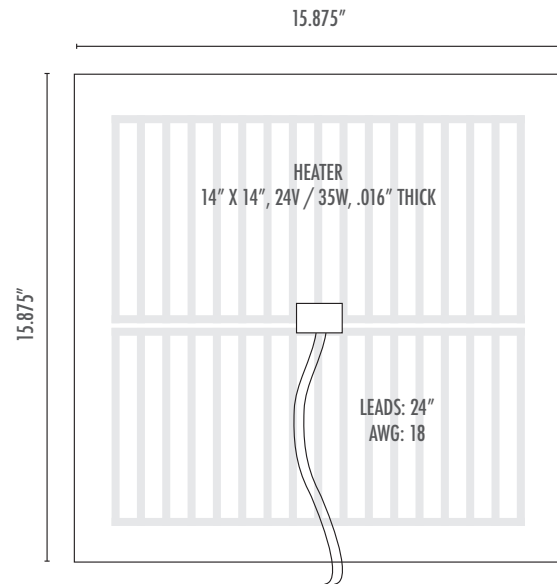


BACK VIEW  
SCALE 3"=1'-0"

### CLASS 2, UL 1310 TRANSFORMER

24VAC 50VA Power Supply

- Input voltage: 120VAC 60Hz
- Rate current: 1600mA
- Output voltage: AC 24 V +/- 5%
- No load voltage: AC 28VMax
- Exciting current (I<sub>o</sub>): 120mA Max. at input 120VAC 60Hz without secondary load.
- Insulation test: 500VDC 100M $\Omega$  Min. between input plug and output terminal and case.
- AC blade pull test: Pull AC blades by 35lb for one minute without pull out from the case.
- Temperature rise: Input 120VAC 60Hz with secondary load 1600mA, shall not exceed 40deg on case surface (By them 10meter) 72deg for primary winding (By resistance method). At ambient temp. 25 °C
- Normal operating temperature at: -10 °C ~ +40 °C
- Storage temperature at: -20 °C ~ +70 °C
- Normal operating humidity at: 30% — 85% R.H.
- Net Weight (APPROX.): 1.6lb.

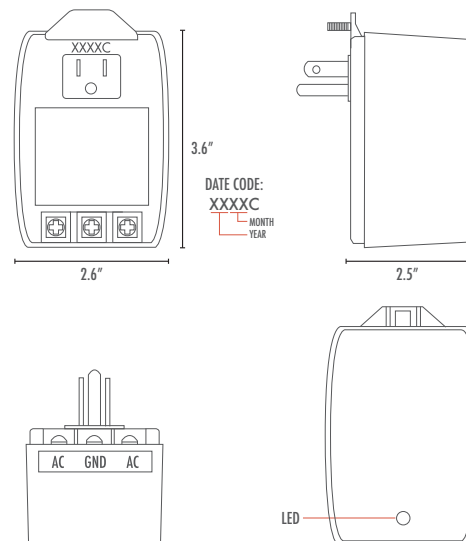

COLOR	WHITE
MATERIAL	ABS
UNIT	IN